



ID651070BZC (2.700 K - IP20)
ID651075BZE (3.000 K - IP20)
ID651071BZD (4.000 K - IP20)

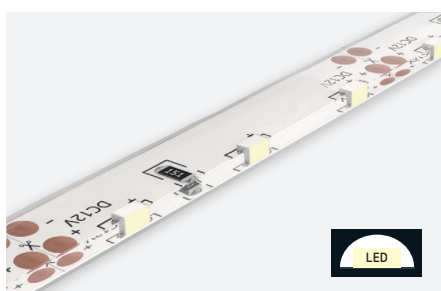


ID651080BZC (2.700 K - IP65)
ID651085BZE (3.000 K - IP65)
ID651081BZD (4.000 K - IP65)

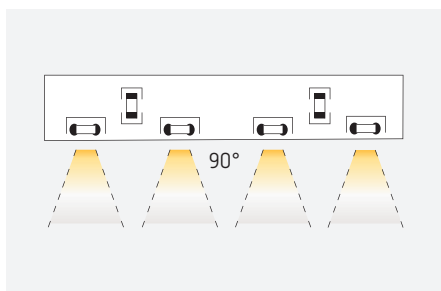

Laterale verlichting

Compatibele profielen



Technische gegevens

Warm wit (2.700 K of 3.000 K) of natuurlijk wit (4.000 K)

7,6 W / m = 38 W / 5 m

96 LEDs / m = 480 LEDs / 5 m

24 V DC voeding **verplicht** (DIM)

Compatibele radiocontroller :

- zender **ID836359BZZ** (LO KINGSTON EM MONO)
- ontvanger **ID836060ZZZ** (LO KINGSTON REC RGB-MONO-TW)

Compatibele profiel

Voor VERONE - IP20 : MERIBEL

L70 B10 50.000 uren

> 30.000 ON / OFF

Knipbaar om de 64 mm / 6 LEDs

Aansluitkabels links en rechts



Bevestiging met dubbelzijdige kleefband (voor buitenmontage wordt sterk aanbevolen om naast de dubbelzijdige, lijmpunten aan te brengen op de strip)

Maximaal aantal van strips na elkaar : 2 (10 m)

Werkings temperatuur : -10 tot +40 °C

Gloeidraadtest : 650°

Afmetingen (mm)

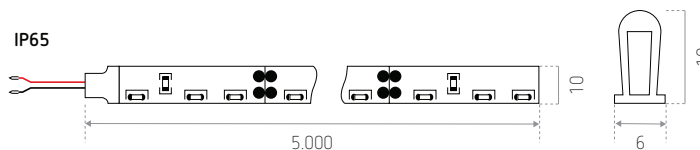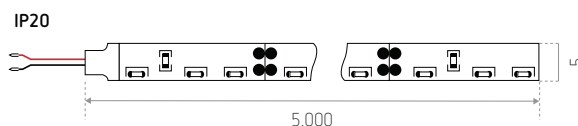

REFERENTIE(S)	BESCHERMING	KLEUR	LUMEN
ID651070BZC (LO VERONE 2700K)		2.700 K	530 lm / m
ID651075BZE (LO VERONE WW)	IP20	3.000 K	550 lm / m
ID651071BZD (LO VERONE NW)		4.000 K	570 lm / m
ID651080BZC (LO VERONE IP65 2700K)		2.700 K	480 lm / m
ID651085BZE (LO VERONE IP65 WW)	IP65	3.000 K	500 lm / m
ID651081BZD (LO VERONE IP65 NW)		4.000 K	520 lm / m