




ID551401BZC (2.700 K - IP20)
ID551405BZE (3.000 K - IP20)
ID551402BZD (4.000 K - IP20)



ID552401BZC (2.700 K - IP67)
ID552405BZE (3.000 K - IP67)
ID552402BZD (4.000 K - IP67)

Compatibele profielen



Technische gegevens

Warm wit (2.700 K of 3.000 K) of natuurlijk wit (4.000 K)

14,4 W / m = 72 W / 5 m

238 LEDs / m = 1.190 LEDs / 5 m

24 V DC voeding **verplicht** (DIM )

Compatibele radiocontroller :

- zender **ID836359BZZ** (LO KINGSTON EM MONO)

- ontvanger **ID836060ZZZ** (LO KINGSTON REC RGB-MONO-TW)

Compatibele profielen

Pour SORIA - IP20 : **ALBI, ALMADA, AVEIRO, BARI, BOOM, CALVI, CUBA, CUBA 2.0, DOUR, HUY, LEON, LUGO, MALTA, MERIBEL, PALMA, PORTO, SINES, SPA** of **VIGO**

Pour SORIA - IP67 : **ALBI, BOOM, DOUR, HUY, LUGO, MERIBEL** of **VIGO**

Uniform lichtverdeling (lichtpunten dichterbij gebracht)

L70 B30 50.000 uren

> 30.000 ON / OFF

Knipbaar om de 30 mm / 7 LEDs

Aansluitkabels links en rechts


Bevestiging met dubbelzijdige kleefband (voor buitenmontage wordt sterk aanbevolen om naast de dubbelzijdige, lijmpunten aan te brengen op de strip)

Maximaal aantal van strips na elkaar : 2 (10 m)


Werkings temperatuur : -20 tot +45 °C

Afmetingen (mm)

IP20

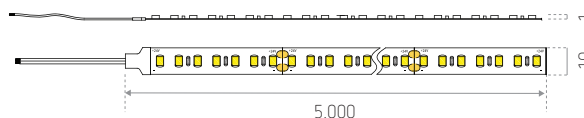

IP67

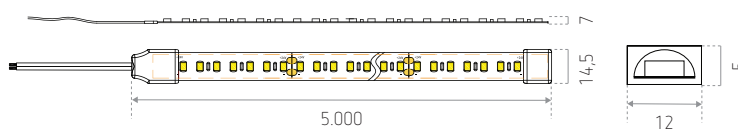

REFERENTIE(S)	BESCHERMING	KLEUR	LUMEN
ID551401BZC (LO SORIA 2700K)		2.700 K	1.300 lm / m
ID551405BZE (LO SORIA WW)	IP20	3.000 K	1.400 lm / m
ID551402BZD (LO SORIA NW)		4.000 K	1.500 lm / m
ID552401BZC (LO SORIA IP67 2700K)		2.700 K	1.250 lm / m
ID552405BZE (LO SORIA IP67 WW)	IP67	3.000 K	1.320 lm / m
ID552402BZD (LO SORIA IP67 NW)		4.000 K	1.390 lm / m