



**ID861001BZC** (2.700 K - IP20 - 5 m)  
**ID861005BZE** (3.000 K - IP20 - 5 m)  
**ID861002BZD** (4.000 K - IP20 - 5 m)

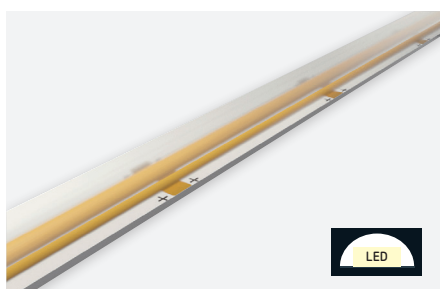

**ID862001BZC** (2.700 K - IP67 - 5 m)  
**ID862005BZE** (3.000 K - IP67 - 5 m)  
**ID862002BZD** (4.000 K - IP67 - 5 m)

Compatibele profielen



### Technische gegevens

Warm wit (2.700 K of 3.000 K) of natuurlijk wit (4.000 K)

9 W / m = 45 W / 5 m

COB

24 V DC voeding **verplicht** (DIM )

Compatibele radiocontrollere :

- zender **ID836359BZZ** (LO KINGSTON EM MONO)

- ontvanger **ID836060ZZZ** (LO KINGSTON REC RGB-MONO-TW)

Compatibele profielen

**Voor MASTA - IP20** : ALBI, ALMADA, AVEIRO, BARI, BINCHE, BOOM, CALVI, CUBA, CUBA 2.0, DOUR, HUY, HOTTON, LEON, LUGO, MALTA, MERIBEL, PALMA, PORTO, SINES, SPA of VIGO

**Voor MASTA - IP67** : ALBI, BOOM, DOUR, HUY, LUGO, MERIBEL of VIGO

L80 B10 30.000 uren

Knipbaar om de 50 mm

Aansluitkabels links en rechts

**De installatie vereist een oppervlakte die de warmte verspreid** (zoals bijvoorbeeld een aluminium profiel)


Maximaal aantal van strips na elkaar: 2 (10 m)

Werkings temperatuur: -20 tot +45 °C


Gloeidraadtest: 650 °C

### Afmetingen (mm)

IP20

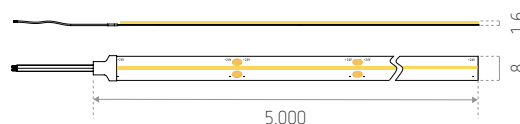

IP67

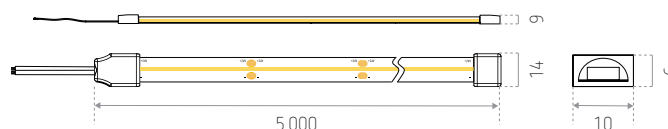

REFERENTIE(S)	BESCHERMING	LICHTBUNDEL	SCDM	KLEUR	LUMEN
<b>ID861001BZC</b> (LO MASTA 2700K)				2.700 K	840 lm / m
<b>ID861005BZE</b> (LO MASTA 3000K)	IP20	140°	< 3	3.000 K	890 lm / m
<b>ID861002BZD</b> (LO MASTA 4000K)				4.000 K	980 lm / m
<b>ID862001BZC</b> (LO MASTA 2700K IP67)				2.700 K	760 lm / m
<b>ID862005BZE</b> (LO MASTA 3000K IP67)	IP67	120°	< 5	3.000 K	840 lm / m
<b>ID862002BZD</b> (LO MASTA 4000K IP67)				4.000 K	930 lm / m